

- PM1000** Desktop Paging Microphone
- PM1060** 6 Ch Desktop Paging Microphone
- PM1120** 12 Ch Desktop Paging Microphone

PM 1000 ANALOGUE SERIES

PM1000 series are available in three variants and had been serving many installations faithfully since its creation. They are available as simple paging mic with chime to those with 6 or 12 zone selections. They are most suitable for simple and small size installations of less than 12 zones in total.

FEATURES

- Condenser gooseneck microphone with illuminated ring
- Pre and post announcement 4 tone chime
- Adjustable chime and mic volume with balance mic / line output level
- Output level selection to mic or line signal to suit the input type of the pre-amplifier mixer
- Dry contact available when mic is active (PM1000 only)
- 6 or 12 zone selection for PM1060 and PM1120


TECHNICAL SPECIFICATIONS

Power requirement	PM1000 : 24V DC adaptor PM1060 / 1120 : 24V DC via D9 conn.
Pwr consumption	50 mA / 150 mA / 150 mA
Zone selection	PM1000 - ALL CALL PM1060 / 1120 - 6 and 12 zones w ALL CALL
Microphone	Condenser mic ; cardioid
Output impedance	600 Ohm
Output level	1.2 V (line output) / balanced mic (775 mV)
Output dry contact	3 A normally open (PM1000 only)
Output controls	Chime and mic level
Audio connection	1/4 " stereo phone jack
Switching connection	D15 connector (PM1060 / 1120 only)
Operating distance	300 m (recommended)
Chime	4 tone up and 4 tone down
Indicators	Mic ring, zone switch, ALL CALL
Frequency response	100 ~ 12 KHz (+/- 3dB ; 0 dB out)
S / N ratio	> 60 dB
Gooseneck mic length	400 mm
Dimensions (WxHxD)	150 x 62 x 186 mm
Weight (kg)	780 / 810 / 850 gms


PAGING MICROPHONES




rear view of PM1000



rear view of PM1060 / PM1120

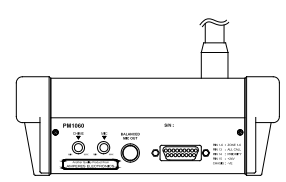

APPLICATION SCHEMATIC

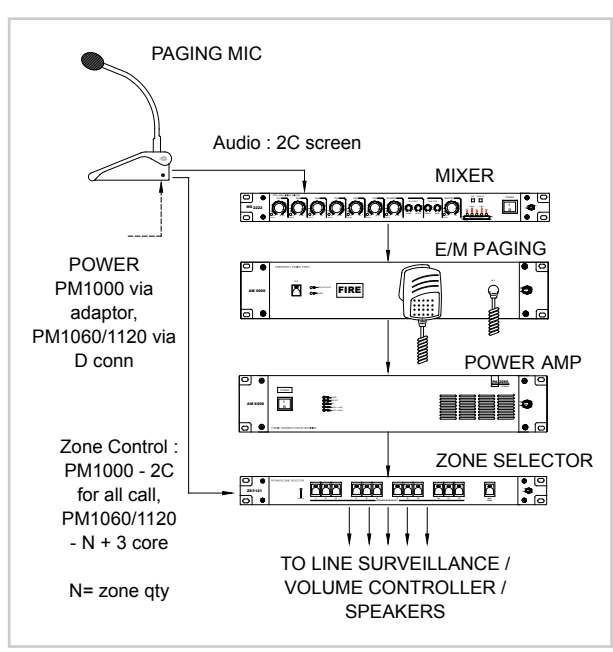

packing information

- Qty per carton : 1 unit
- W x H x D : 525 x 85 x 270 mm
- Weight : PM 1000 - 1.8 kg (incl adaptor)
- : PM 1060 - 1.15 kg
- : PM 1120 - 1.2 kg